




- Common mode inductors for EMI/EMC main line and data line filters
- Excellent common mode interference suppression
- Good differential mode filtering against symmetrical interferences
- High insulation between windings
- Excellent performances/dimensions ratio
- Others values on request
- Available in Design kit (see on <https://www.itacoilweb.com/portfolio/inductors-design-kit/>)

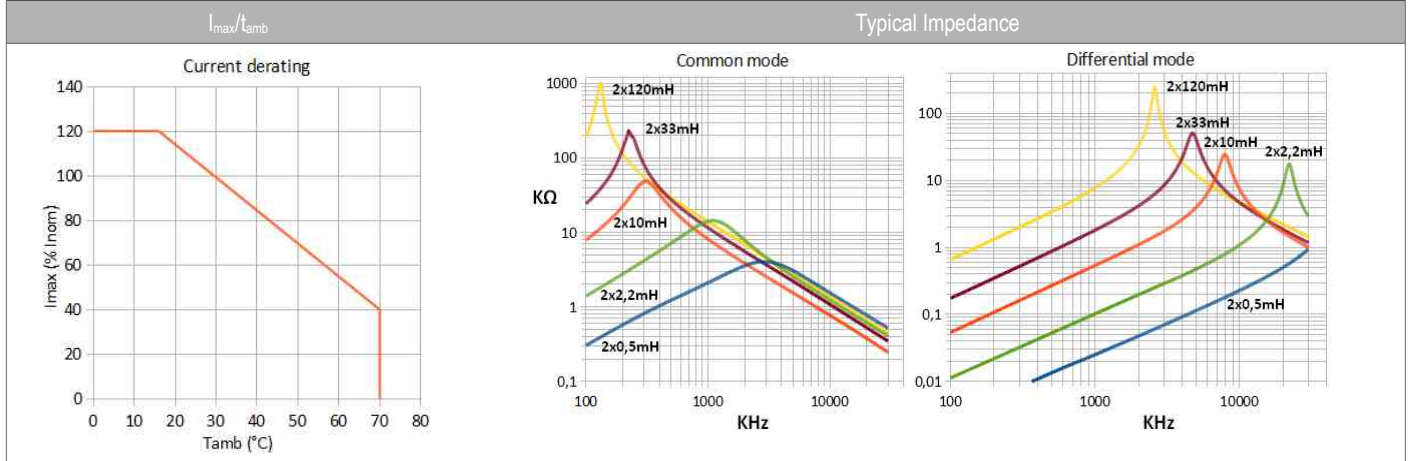

| Code                   | Nominal Inductance | Minimal Inductance | Stray Inductance typ | Nominal Current <sup>1</sup> | Typical DCR <sup>2</sup> | Main Rated Voltage | N1/N2 Dielectric strength |
|------------------------|--------------------|--------------------|----------------------|------------------------------|--------------------------|--------------------|---------------------------|
| SCLE08501              | 2x0,5 mH           | 2x0,35 mH          | 3,4 μH               | 1,39 A                       | 80 mΩ                    | 250V               | 1,5KV                     |
| SCLE08102              | 2x1,0 mH           | 2x0,7 mH           | 8,7 μH               | 0,97 A                       | 160 mΩ                   | 250V               | 1,5KV                     |
| SCLE08222              | 2x2,2 mH           | 2x1,5 mH           | 18 μH                | 0,68 A                       | 330 mΩ                   | 250V               | 1,5KV                     |
| SCLE08472              | 2x4,7 mH           | 2x3,3 mH           | 43 μH                | 0,45 A                       | 740 mΩ                   | 250V               | 1,5KV                     |
| SCLE08103 <sup>P</sup> | 2x10 mH            | 2x7,0 mH           | 90 μH                | 0,30 A                       | 1,61 Ω                   | 250V               | 1,5KV                     |
| SCLE08183              | 2x18 mH            | 2x12,6 mH          | 150 μH               | 0,235 A                      | 2,75 Ω                   | 250V               | 1,5KV                     |
| SCLE08333 <sup>P</sup> | 2x33 mH            | 2x23,1 mH          | 280 μH               | 0,175 A                      | 5,0 Ω                    | 250V               | 1,5KV                     |
| SCLE08683 <sup>P</sup> | 2x68 mH            | 2x47,6 mH          | 570 μH               | 0,118 A                      | 11,1 Ω                   | 250V               | 1,5KV                     |
| SCLE08124              | 2x120 mH           | 2x84 mH            | 1030 μH              | 0,090 A                      | 19,0 Ω                   | 250V               | 1,5KV                     |

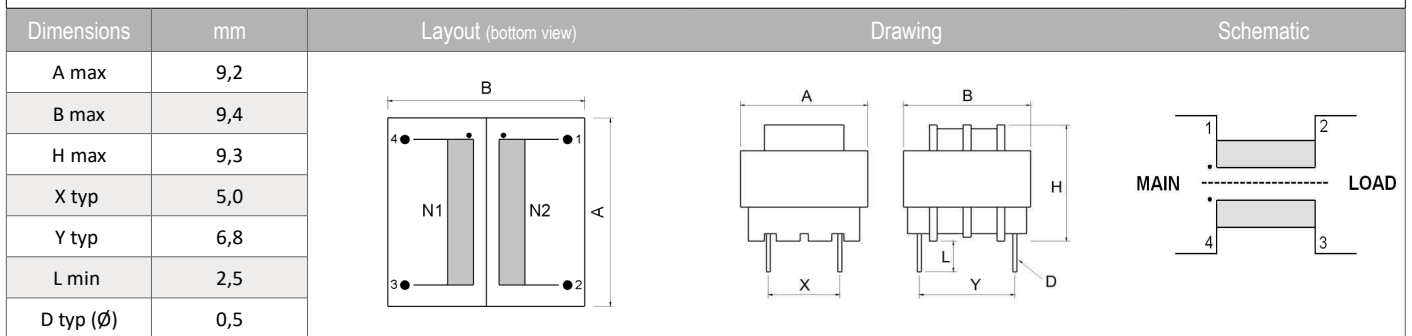


<sup>1</sup> Max continuous current for 40°C nominal temperature rise (@20°C).

<sup>2</sup> Referred to each winding (@20°C).




<sup>P</sup> Preferential items usually in stock.

## SCLE16(V) series – 2x1mH/2.3A ... 2x120mH/240mA

- Common mode inductors for EMI/EMC main line filters
- Excellent common mode interference suppression
- Good differential mode filtering against symmetrical interferences
- High insulation between windings
- Excellent performances/dimensions ratio
- Others values on request
- Available in Design kit (see on <https://www.itacoilweb.com/portfolio/inductors-design-kit/>)



| Horizontal version Code | Vertical version Code | Nominal Inductance <sup>1</sup> | Stray Inductance typ | Nominal Current <sup>2</sup> | Typical DCR <sup>3</sup> | Main Rated Voltage | N1/N2 Dielectric strength |
|-------------------------|-----------------------|---------------------------------|----------------------|------------------------------|--------------------------|--------------------|---------------------------|
| SCLE16102               | SCLE16V102            | 2x1,0 mH                        | 12 µH                | 2,30 A                       | 56 mΩ                    | 250V               | 1,5KV                     |
| SCLE16222               | SCLE16V222            | 2x2,2 mH                        | 27 µH                | 1,64 A                       | 127 mΩ                   | 250V               | 1,5KV                     |
| SCLE16332               | SCLE16V332            | 2x3,3 mH                        | 46 µH                | 1,37 A                       | 155 mΩ                   | 250V               | 1,5KV                     |
| SCLE16472               | SCLE16V472            | 2x4,7 mH                        | 56 µH                | 1,18 A                       | 243 mΩ                   | 250V               | 1,5KV                     |
| SCLE16103 <sup>P</sup>  | SCLE16V103            | 2x10 mH                         | 121 µH               | 0,79 A                       | 490 mΩ                   | 250V               | 1,5KV                     |
| SCLE16183               | SCLE16V183            | 2x18 mH                         | 216 µH               | 0,60 A                       | 930 mΩ                   | 250V               | 1,5KV                     |
| SCLE16333 <sup>P</sup>  | SCLE16V333            | 2x33 mH                         | 401 µH               | 0,44 A                       | 1,66 Ω                   | 250V               | 1,5KV                     |
| SCLE16683 <sup>P</sup>  | SCLE16V683            | 2x68 mH                         | 824 µH               | 0,30 A                       | 3,26 Ω                   | 250V               | 1,5KV                     |
| SCLE16124               | SCLE16V124            | 2x120 mH                        | 1448 µH              | 0,24 A                       | 5,95 Ω                   | 250V               | 1,5KV                     |

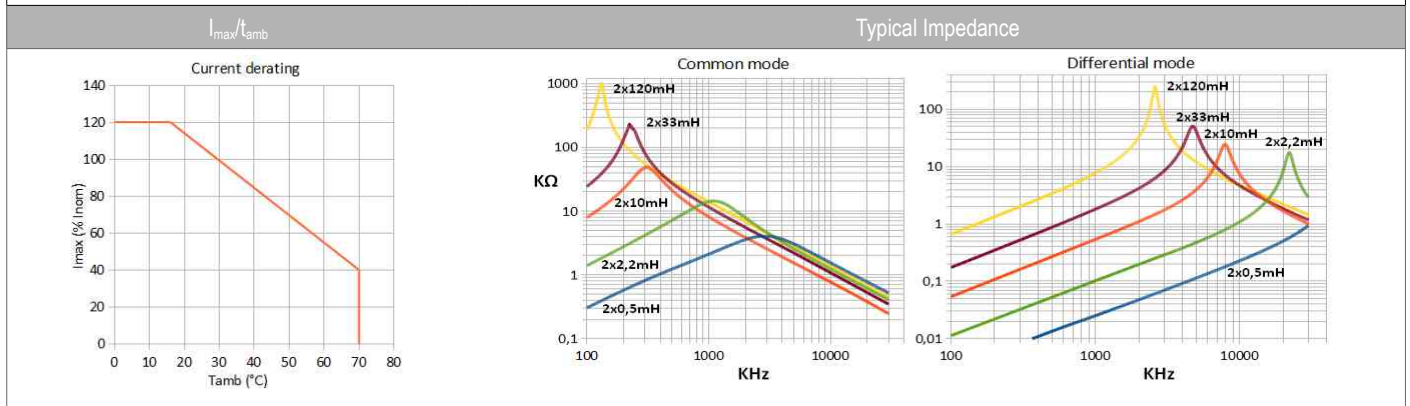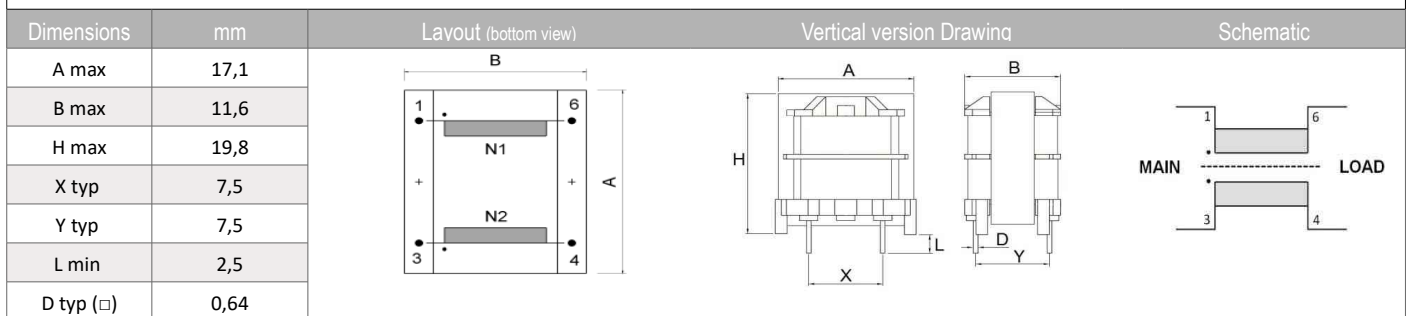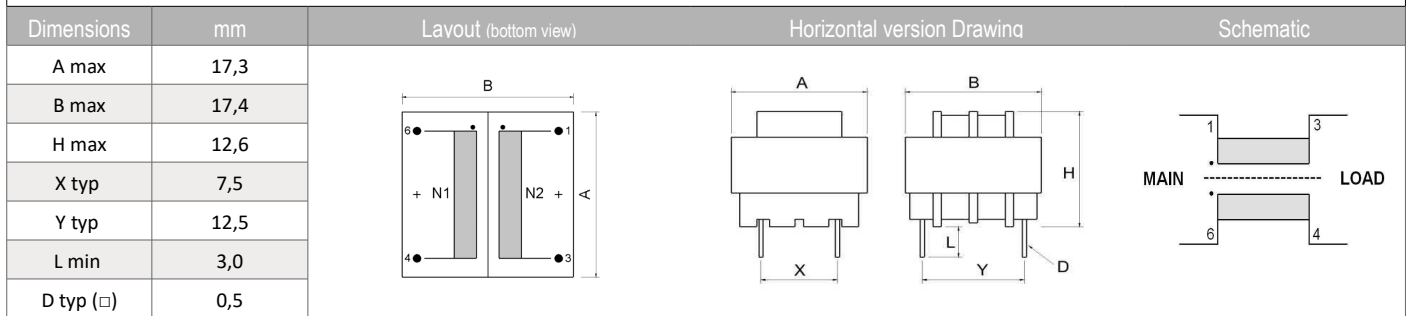


<sup>1</sup> Tolerances -30%/+50% - Measured @10KHz-100mV.

<sup>2</sup> Max continuous current for 40°C nominal temperature rise (@20°C).

<sup>3</sup> Referred to each winding (@20°C).


<sup>P</sup> Preferential items usually in stock.

- Common mode inductors for EMI/EMC main line filters
- Excellent common mode interference suppression
- Good differential mode filtering against symmetrical interferences
- High insulation between windings
- Excellent performances/dimensions ratio
- Others values on request



| Code                    | Nominal Inductance <sup>1</sup> | Stray Inductance typ | Nominal Current <sup>2</sup> | Typical DCR <sup>3</sup> | Main Rated Voltage | N1/N2 Dielectric strength |
|-------------------------|---------------------------------|----------------------|------------------------------|--------------------------|--------------------|---------------------------|
| SCLE20V102              | 2x1,0 mH                        | 15 µH                | 3,50 A                       | 33mΩ                     | 250V               | 1,5KV                     |
| SCLE20V222              | 2x2,2 mH                        | 30 µH                | 2,44 A                       | 64 mΩ                    | 250V               | 1,5KV                     |
| SCLE20V472              | 2x4,7 mH                        | 64 µH                | 1,69 A                       | 134 mΩ                   | 250V               | 1,5KV                     |
| SCLE20V103 <sup>p</sup> | 2x10 mH                         | 138 µH               | 1,13 A                       | 298 mΩ                   | 250V               | 1,5KV                     |
| SCLE20V183              | 2x18 mH                         | 243 µH               | 0,85 A                       | 532 mΩ                   | 250V               | 1,5KV                     |
| SCLE20V333 <sup>p</sup> | 2x33 mH                         | 440 µH               | 0,63 A                       | 973 mΩ                   | 250V               | 1,5KV                     |
| SCLE20V683 <sup>p</sup> | 2x68 mH                         | 896 µH               | 0,44 A                       | 2,00 Ω                   | 250V               | 1,5KV                     |

| Dimensions | mm   | Layout (bottom view) | Drawing | Schematic |
|------------|------|----------------------|---------|-----------|
| A max      | 21,2 |                      |         |           |
| B max      | 13,8 |                      |         |           |
| H max      | 21,7 |                      |         |           |
| X tip      | 10,0 |                      |         |           |
| Y tip      | 10,0 |                      |         |           |
| L min      | 3,5  |                      |         |           |
| D tip (□)  | 0,64 |                      |         |           |

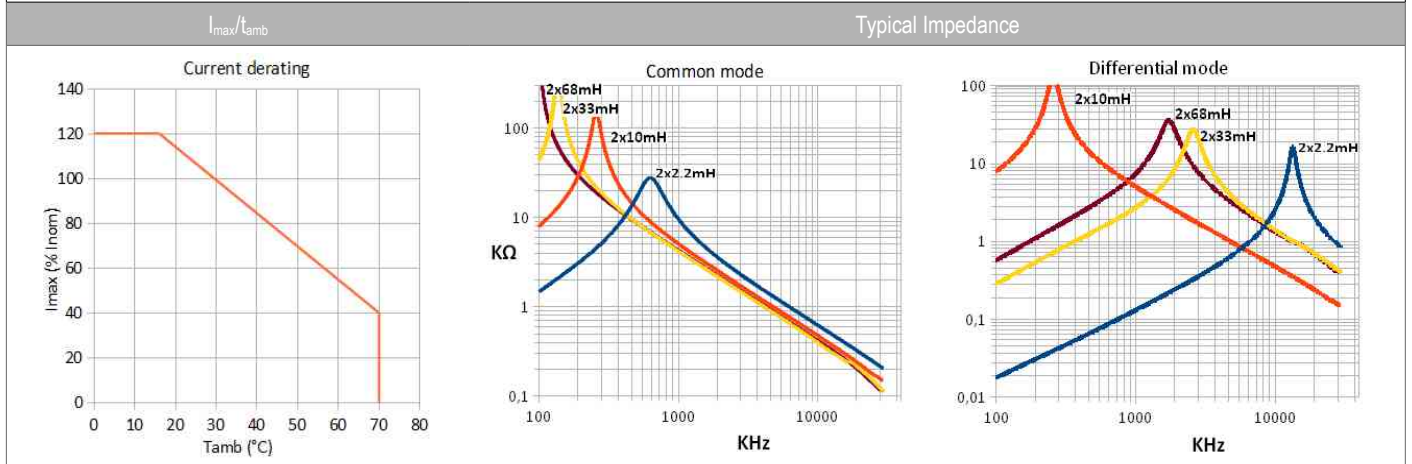

<sup>1</sup> Tolerances -30%/+50% - Measured @10KHz-100mV.


<sup>2</sup> Max continuous current for 40°C nominal temperature rise (@20°C).

<sup>3</sup> Referred to each winding (@20°C).

<sup>p</sup> Preferential items usually in stock.


## SCLE25 series - 2x2.2mH/4A ... 2x68mH/760mA

- Common mode inductors for EMI/EMC main line filters
- Excellent common mode interference suppression
- High frequency improved attenuation by sectional windings
- Good differential mode filtering against symmetrical interferences
- High insulation between windings
- Excellent performances/dimensions ratio
- Others values on request
- Available in Design kit (see on <https://www.itacoilweb.com/portfolio/inductors-design-kit/>)



| Code                   | Nominal Inductance <sup>1</sup> | Stray Inductance typ | Nominal Current <sup>2</sup> | Typical DCR <sup>3</sup> | Main Rated Voltage | N1/N2 Dielectric strength |
|------------------------|---------------------------------|----------------------|------------------------------|--------------------------|--------------------|---------------------------|
| SCLE25222              | 2x2,2 mH                        | 23 μH                | 4,00 A                       | 36 mΩ                    | 250V               | 1,5KV                     |
| SCLE25472              | 2x4,7 mH                        | 47 μH                | 2,75 A                       | 75 mΩ                    | 250V               | 1,5KV                     |
| SCLE25103 <sup>P</sup> | 2x10 mH                         | 100 μH               | 1,93 A                       | 150 mΩ                   | 250V               | 1,5KV                     |
| SCLE25183              | 2x18 mH                         | 182 μH               | 1,39 A                       | 300 mΩ                   | 250V               | 1,5KV                     |
| SCLE25333 <sup>P</sup> | 2x33 mH                         | 340 μH               | 1,05 A                       | 500 mΩ                   | 250V               | 1,5KV                     |
| SCLE25683 <sup>P</sup> | 2x68 mH                         | 680 μH               | 0,76 A                       | 960 mΩ                   | 250V               | 1,5KV                     |

| Dimensions | mm   | Layout (bottom view) | Drawing | Schematic |
|------------|------|----------------------|---------|-----------|
| A max      | 26,3 |                      |         |           |
| B max      | 27,1 |                      |         |           |
| H max      | 21,4 |                      |         |           |
| X typ      | 15,0 |                      |         |           |
| Y typ      | 20,0 |                      |         |           |
| L min      | 2,5  |                      |         |           |
| D typ (∅)  | 0,65 |                      |         |           |

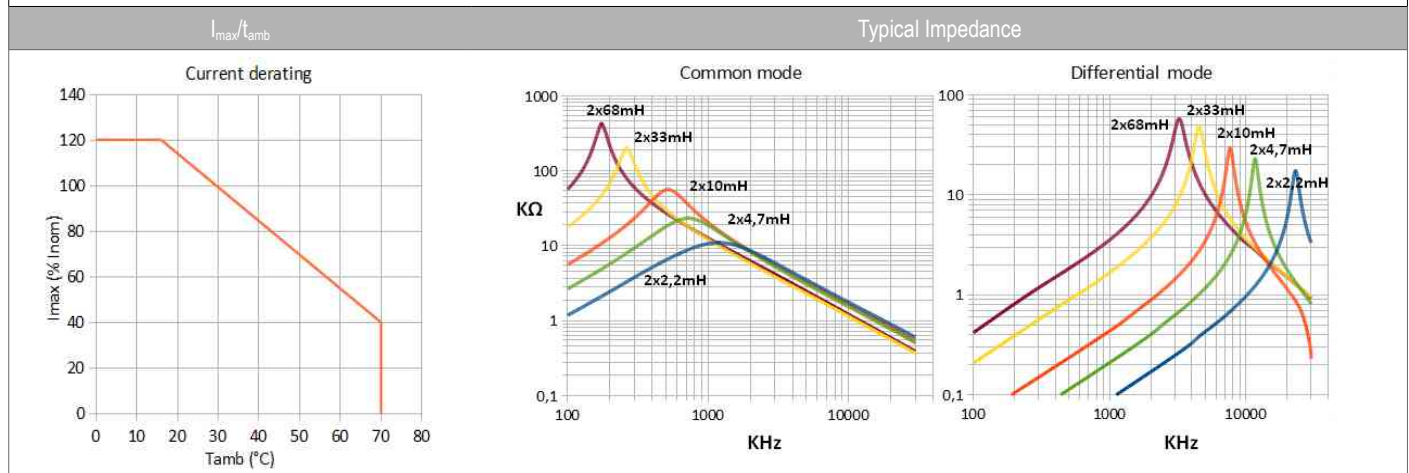

<sup>1</sup> Tolerances -30%/+50% - Measured @10KHz-100mV.

<sup>2</sup> Max continuous current for 40°C nominal temperature rise (@20°C).

<sup>3</sup> Referred to each winding (@20°C).

<sup>P</sup> Preferential items usually in stock.